

# Airdach

Heating &  
Air Conditioning

## Airdach Front Return Air Handler

A4RH Series

Cooling capacity: 18-36 kBtu/h



### Contents:

|                                   |    |
|-----------------------------------|----|
| 1 PRODUCT LINEUP.....             | 2  |
| 2 NOMENCLATURE.....               | 2  |
| 3 SPECIFICATIONS.....             | 3  |
| 4 DIMENSIONAL DRAWING.....        | 5  |
| 5 ELECTRICAL CHARACTERISTICS..... | 6  |
| 6 AIRFLOW DATA.....               | 8  |
| 7 WIRING DIAGRAMS.....            | 10 |



### Standard Features:

- Direct-drive, multi-speed motors allow air volume variation for heating / cooling.
  - Multi-speed PSC motor: M134 series
- Thermoplastic drain pan with bottom primary and secondary drain connections.
- Built-in filter rack.
- Wall-hanging bracket included.
- Front or bottom return available.
- Optional heating elements in 5kW, 7.5kW, and 10kW.
- All-aluminum coil.
- AHRI listed and ETL listed.
- R454B refrigerant sensor is configured to ensure safe operation.
- R454B refrigerant sensor is factory-installed, more rooms are available for installation.

## 1 Product lineup


|              |   |
|--------------|---|
| <b>Model</b> | <b>A4RH1800MP1DT<br/>A4RH2400MP1DT<br/>A4RH3000MP1DT<br/>A4RH3600MP1DT</b>        |
| Power supply | 208/230V-1Ph-60Hz   |
| Appearance   |  |

## 3 Specifications

### PSC

|  | A4RH1800MP1DT | A4RH2400MP1DT | A4RH3000MP1DT | A4RH3600MP1DT |
|--|---------------|---------------|---------------|---------------|
| <b>NOMINAL RATING</b>                  |               |               |               |               |
| Cooling (BTU/h)                        | 18,000        | 24,000        | 30,000        | 36,000        |
| External Static Pressure (in.w.c)      | 0.6           | 0.6           | 0.6           | 0.6           |
| <b>ELECTRICAL DATA</b>                 |               |               |               |               |
| Voltage / Phase (60Hz)                 | 208/230V-1Ph  | 208/230V-1Ph  | 208/230V-1Ph  | 208/230V-1Ph  |
| Min. / Max. Voltage (V)                | 208/230V      | 208/230V      | 208/230V      | 208/230V      |
| Min. Circuit Amps (MCA) (A)            | 1.2           | 1.7           | 2.8           | 2.8           |
| Max. Overcurrent Protection (MOP) (A)  | 15            | 15            | 15            | 15            |
| <b>FAN MOTOR</b>                       |               |               |               |               |
| Motor Type                             | PSC           | PSC           | PSC           | PSC           |
| Capacitor (uF)                         | 6             | 6             | 15            | 10            |
| Horsepower (HP)                        | 1/6           | 1/5           | 1/3           | 1/3           |
| Rated RPM                              | 650           | 750           | 1130          | 1150          |
| Full Load Amps (FLA) (A)               | 0.9           | 1.3           | 2.2           | 2.2           |
| <b>Refrigerant Detector</b>            |               |               |               |               |
| Number of Detector                     | 1             | 1             | 1             | 1             |
| Type                                   | TC/NDIR       | TC/NDIR       | TC/NDIR       | TC/NDIR       |
| Detection Threshold Limit Value (DTLV) | 0.1           | 0.1           | 0.1           | 0.1           |
| Measurement Range                      | 0~100%        | 0~100%        | 0~100%        | 0~100%        |
| Operating temp (°F)                    | -22~158       | -22~158       | -22~158       | -22~158       |
| <b>FAN BLOWER</b>                      |               |               |               |               |
| Material                               | Metal         | Metal         | Metal         | Metal         |
| Type                                   | Centrifugal   | Centrifugal   | Centrifugal   | Centrifugal   |
| Diameter (in.)                         | 10            | 10            | 10            | 10            |
| Height (in.)                           | 6             | 6             | 9             | 9             |
| <b>EVAPORATOR COIL</b>                 |               |               |               |               |
| Type                                   | Tube & Fin    | Tube & Fin    | Tube & Fin    | Tube & Fin    |
| Tube Material                          | Aluminum      | Aluminum      | Aluminum      | Aluminum      |
| Tube Size (mm)                         | 7             | 7             | 7             | 7             |
| <b>Sound Pressure Level dBA</b>        | 49            | 52            | 53            | 54            |
| <b>REFRIGERANT CONNECTION SIZE</b>     |               |               |               |               |
| Liquid Line Size (O.D.) (in.)          | 3/8           | 3/8           | 3/8           | 3/8           |
| Suction Line Size (O.D.) (in.)         | 3/4           | 3/4           | 3/4           | 3/4           |

**4 Dimensional Drawing**

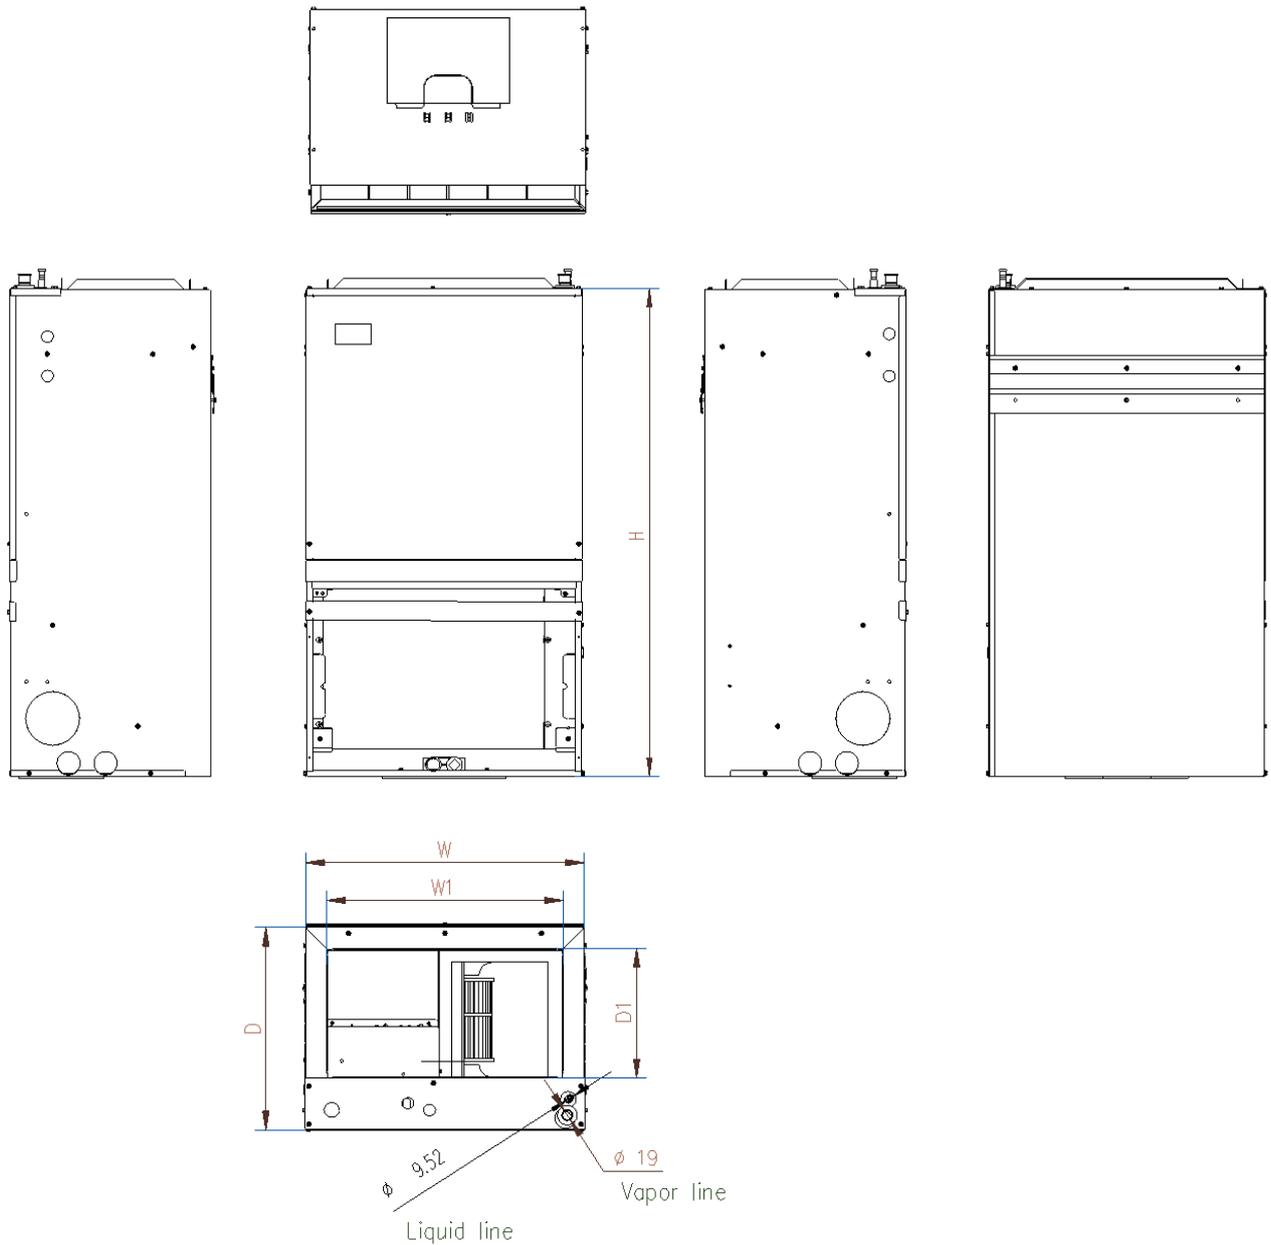

| Model Size     | Dimensions- (in.) [mm] |              |              |          |             |
|----------------|------------------------|--------------|--------------|----------|-------------|
|                | Height H               | Width W      | Width W1     | Depth D  | Depth D1    |
| <b>18K/24K</b> | 36-1/2 [928]           | 20-1/2 [521] | 17-2/5 [442] | 15 [381] | 9-1/2 [242] |
| <b>30K/36K</b> | 39-1/2 [1004]          | 22 [559]     | 18-4/5 [478] | 19 [483] | 9-1/2 [242] |



## 5 Electrical Characteristics

### Electric Heater Kit Electrical Data

PSC

| Heater Kit Model Used | Air Handler Model | Electric Heat(kW) | Min. Circuit Ampacity |      | Max. Fuse or Breaker (HACR) Ampacity |      |
|-----------------------|-------------------|-------------------|-----------------------|------|--------------------------------------|------|
|                       |                   |                   | 240V                  | 208V | 240V                                 | 208V |
|                       |                   |                   |                       |      |                                      |      |
| <b>A4RH1800MP1DT</b>  | EHK205B           | 5                 | 27.0                  | 23.7 | 30.0                                 | 30.0 |
|                       | EHK208B           | 7.5               | 40.2                  | 35.0 | 50.0                                 | 50.0 |
|                       | EHK210B           | 10                | 53.3                  | 46.3 | 60.0                                 | 60.0 |
| <b>A4RH2400MP1DT</b>  | EHK205B           | 5                 | 27.7                  | 24.2 | 30.0                                 | 30.0 |
|                       | EHK208B           | 7.5               | 40.7                  | 35.5 | 50.0                                 | 50.0 |
|                       | EHK210B           | 10                | 53.8                  | 46.8 | 60.0                                 | 60.0 |
| <b>A4RH3000MP1DT</b>  | EHK205B           | 5                 | 28.8                  | 25.4 | 30.0                                 | 30.0 |
|                       | EHK208B           | 7.5               | 41.9                  | 36.7 | 50.0                                 | 50.0 |
|                       | EHK210B           | 10                | 54.9                  | 47.9 | 60.0                                 | 60.0 |
| <b>A4RH3600MP1DT</b>  | EHK205B           | 5                 | 28.6                  | 25.1 | 30.0                                 | 30.0 |
|                       | EHK208B           | 7.5               | 41.6                  | 36.4 | 50.0                                 | 50.0 |
|                       | EHK210B           | 10                | 54.6                  | 47.7 | 60.0                                 | 60.0 |

**Electric Heater Power Wiring Diagrams**

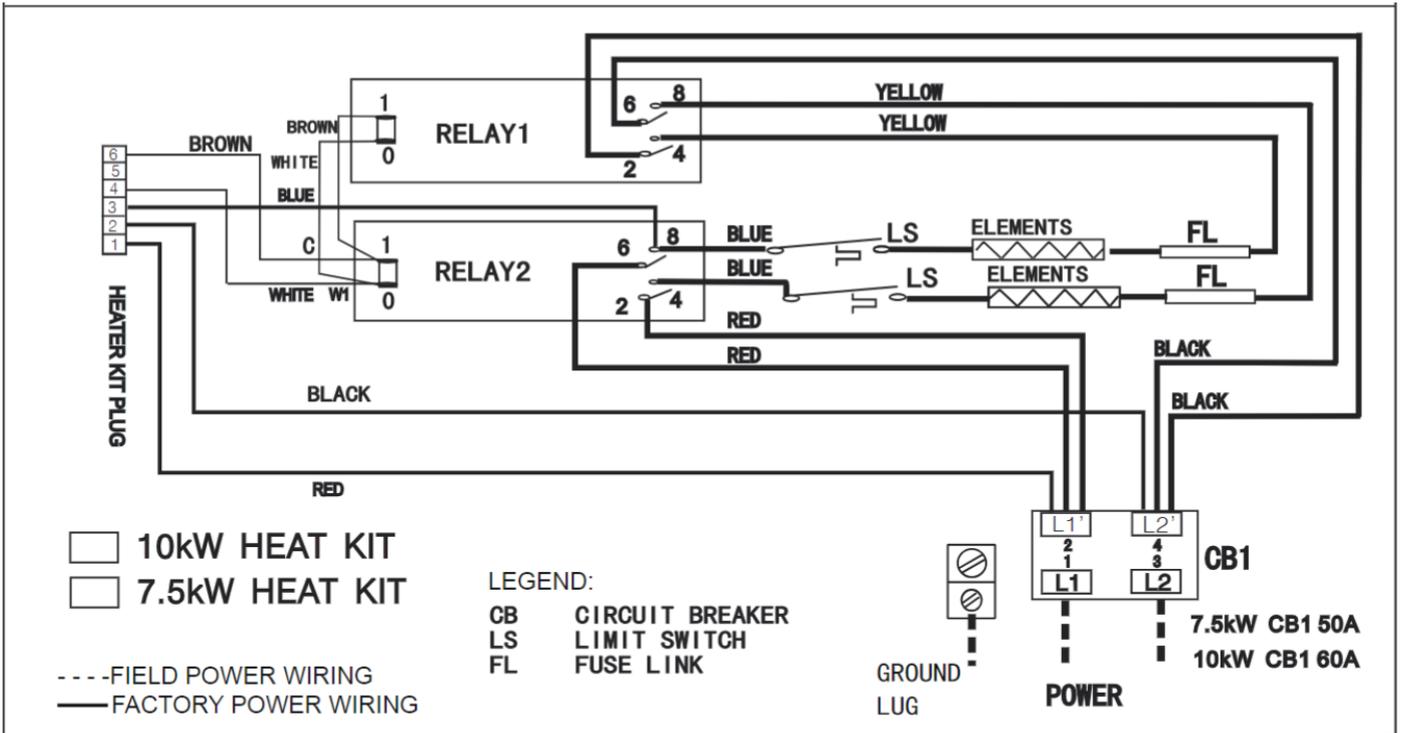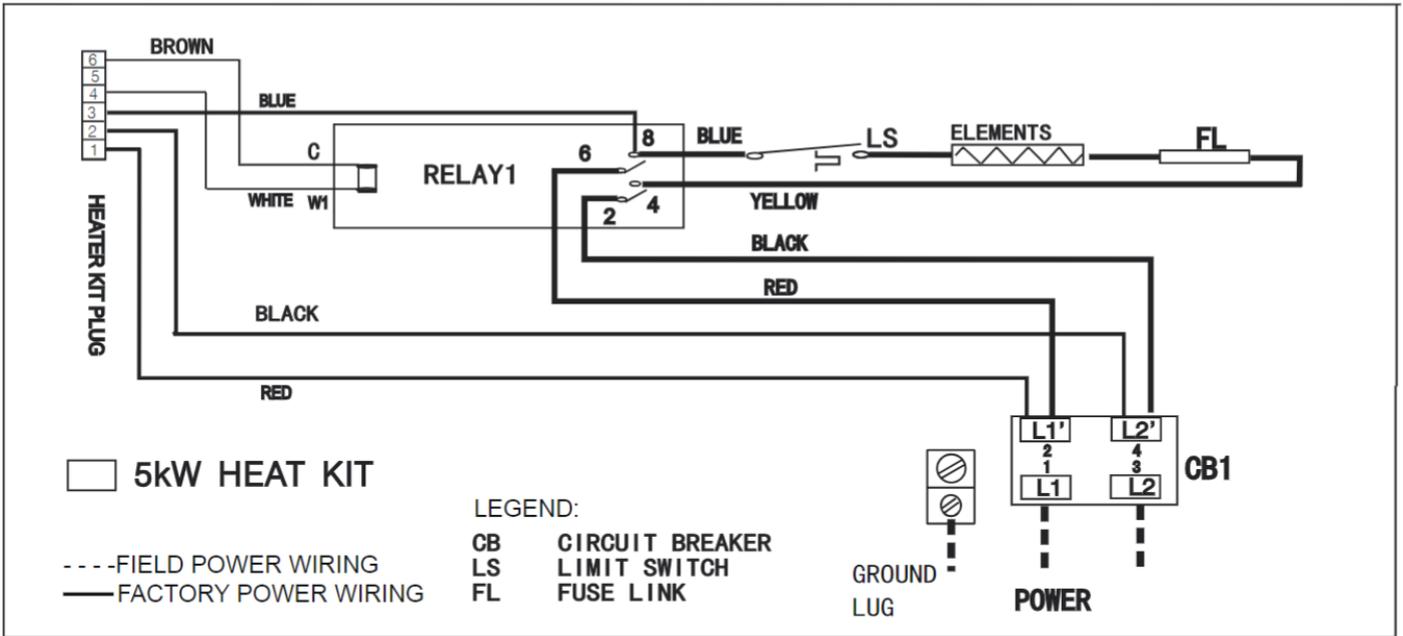

## 6 Airflow Data


| PSC MODEL  | BLOWER SPEEDS          | EXTERNAL STATIC PRESSURE (in.w.c.) |      |      |      |      |      |      |     |     |
|------------|------------------------|------------------------------------|------|------|------|------|------|------|-----|-----|
|            |                        | 0                                  | 0.1  | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7 | 0.8 |
| 18 (1-1/2) | Low                    | 604                                | 562  | 527  | 485  | 441  | 387  | -    | -   | -   |
|            | Med                    | 697                                | 655  | 619  | 577  | 533  | 479  | 426  | 380 |     |
|            | High (default setting) | 802                                | 761  | 721  | 682  | 637  | 592  | 541  | 481 | 408 |
| 24 (2)     | Low                    | 665                                | 629  | 589  | 547  | 508  | 480  | -    | -   | -   |
|            | Med                    | 831                                | 786  | 741  | 696  | 655  | 609  | 559  | 497 | -   |
|            | High (default setting) | 932                                | 881  | 833  | 786  | 742  | 689  | 636  | 574 | 515 |
| 30 (2-1/2) | Low                    | 988                                | 948  | 900  | 862  | 816  | 772  | 719  | 642 | 613 |
|            | Med (default setting)  | 1197                               | 1152 | 1097 | 1046 | 998  | 940  | 886  | 821 | 737 |
|            | High                   | 1338                               | 1284 | 1220 | 1159 | 1096 | 1029 | 960  | 879 | 792 |
| 36 (3)     | Low                    | 1118                               | 1072 | 1018 | 971  | 920  | 876  | 819  | 759 | 693 |
|            | Med                    | 1262                               | 1213 | 1160 | 1098 | 1049 | 998  | 937  | 871 | 804 |
|            | High (default setting) | 1360                               | 1311 | 1263 | 1229 | 1166 | 1074 | 1005 | 934 | 867 |

--- NOTES: Shaded boxes represent airflow outside the required 300-450 CFM/ton.

1. Airflow data includes electric heat and filter.
2. Airflow data is with no return grill. When using a return grill on 18 & 24 sizes, decrease numbers above by approx. 10 CFM. For 30 & 36 sizes, decrease numbers above by approx. 50 CFM.

## 7 Wiring Diagram

PSC

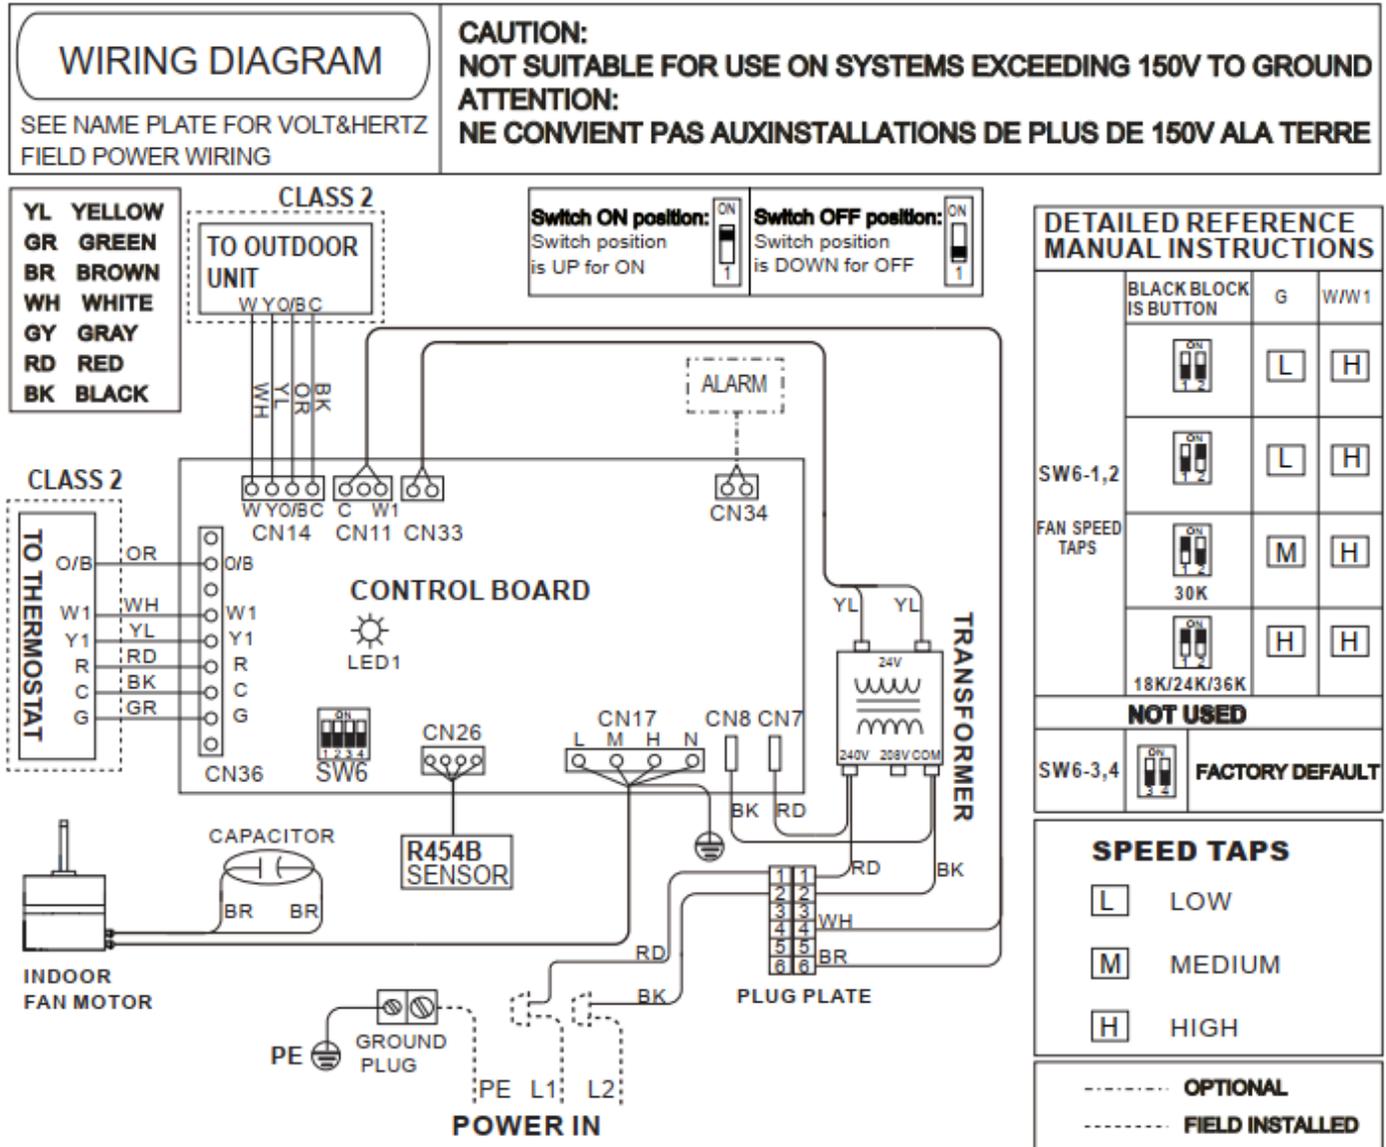

**NOTES:**

- 1: Connect R to R, G to G, Y to Y, etc. See outdoor instruction for details.
  - 2: If some signal lines of **CN36** are not used, please wrap them up separately with **CAP**.
- ⚠ CAUTION:**
- 1: Use copper wire (75°C min) only between disconnect switch and unit.
  - 2: To be wired in accordance with **NEC** and local codes.
  - 3: If any of the original wires, as supplied, must be replaced. Use the same or equivalent type wires.
  - 4: If the input voltage is 208 V, please change the transformer tap by taking the red wire to **208V** terminal.
  - 5: The rated operating condition of **Alarm** is 24 VAC/1A or 30 VDC/1A or 250 VAC/1A. Please refer to the manual for wiring methods.

| LED1 STATUS   | CONTENT         | Factory code                                 |              |      |          |                |                 |   |
|---|-----------------|--|--------------|------|----------|----------------|-----------------|---|
|   | STEADY ON       | NORMAL OPERATION                             |              |      |          |                |                 |   |
|   | OFF             | POWER SUPPLY FAILURE                         |              |      |          |                |                 |   |
|   | STEADY FLASHING | DISSIPATION MODE ACTIVE                      |              |      |          |                |                 |   |
|   | 3 FLASH/CYCLE   | R454B REFRIGERANT SENSOR FAULT               |              |      |          |                |                 |   |
|   | 4 FLASH/CYCLE   | R454B REFRIGERANT SENSOR COMMUNICATION FAULT |              |      |          |                |                 |   |
|   | 8 FLASH/CYCLE   | R454B REFRIGERANT SENSOR OVER SERVICE LIFE   |              |      |          |                |                 |   |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;">Factory code</th> <th style="width: 33%;">Date</th> <th style="width: 33%;">Revision</th> </tr> </thead> <tbody> <tr> <td>16023000014593</td> <td>Jan. 18th, 2024</td> <td>C</td> </tr> </tbody> </table> |                 |  | Factory code | Date | Revision | 16023000014593 | Jan. 18th, 2024 | C |
| Factory code  | Date            | Revision                                     |              |      |          |                |                 |   |
| 16023000014593  | Jan. 18th, 2024 | C  |              |      |          |                |                 |   |

---

**OLDACH**  
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER

